

Engineering built smarter.
Solutions built to last.

Tuboshu delivers engineering built for Africa’s toughest conditions.

For decades, our team has designed and manufactured heavy equipment engineered to withstand the demands of Africa’s most challenging environments – from remote construction sites to high-volume industrial operations. Every machine in our range is built on a foundation of rigorous engineering standards, adaptive design, and field-tested durability.

We don’t just supply equipment – we deliver complete operational solutions. Our machines are developed to solve the real-world challenges operators face daily: unpredictable terrain, extreme climates, limited access to spare parts, and the need for equipment that performs consistently under sustained heavy use.

Quality is engineered into every stage of our process, from material selection through to final assembly. This commitment is backed by a growing service network across the region, offering scheduled maintenance, responsive technical assistance, and ongoing after-sales support – ensuring your equipment stays productive for the full life of the project, not just the day it leaves the yard.



TUBOSHU

tuboshu.co.uk

© 2026 Tuboshu. All Rights Reserved

Certain specification(s) are based on engineering calculations and are not actual measurements. Specification(s) are provided for comparison purposes only and are subject to change without notice. Specification(s) for your individual Tuboshu equipment will vary based on normal variations in design, manufacturing, operating conditions, and other factors. Pictures of Develon units may show other than standard equipment.

TUBOSHU⁷

ELEVATE YOUR POWER

TECHNICAL SPECS SHEET
TG220



UNFORGIVING GROUND. UNSTOPPABLE MACHINES

Tuboshu equipment is engineered for the sites that don't wait - built tough, built to deliver, wherever the work is.

MACHINE TYPE
MOTOR GRADER

MACHINE MODEL
TG220

VERSION
2026

TUBOSHU | 9 Dallington Street, London EC1V 0BZ, United Kingdom
After Sales: +44 7457 408 00 | info@tuboshu.co.uk | www.tuboshu.co.uk

TECHNICAL SPECIFICATION

CHARACTERISTICS

Manufacturer	TUBOSHU
Model	TG220-D
Configuration Number	TUPY220UK
Operating Weight (with ripper)	15,760 kg

ENGINE

Model	Dongfeng Cummins 6CTA8.3-C215
Type	Direct injection, turbocharged, water-cooled
Rated Power	160 kW @ 2200 rpm
Max. Torque	908 N.m @ 1300 rpm

BLADE RANGE

Side Shift	Right 815 mm / Left 815 mm
Max Shoulder Reach	Right 2425 mm / Left 2425 mm
Max Lift Above Ground	450 mm
Max Grading Depth	535 mm
Max Blade Angle	90°
Blade Tip Angle	29°-77°

TRANSMISSION SYSTEM

Type	ZF electro-hydraulic power shift
Operation	Single-handle, neutral lock
Forward Speeds	6.86 / 11.78 / 15.51 / 26.17 / 32.59 / 50.86 km/h
Reverse Speeds	6.86 / 15.51 / 32.59 km/h

AXLES

Front Axle	610 mm clearance, ±16° oscillation
Rear Axle	Full-floating, NO-SPIN differential

TANDEM DRIVE

Tandem Oscillation	13° forward & reverse
Final Drive	Spiral bevel gear, single-stage
Tandem Drive	Double-row roller chain
Min Turning Radius	7400 mm

BRAKES

Service Brakes	Hydraulic drum brake
Parking Brakes	Inner-expanding drum, flexible shaft control

CABIN


Vibration-absorbed humanistic cabin with adjustable steering wheel and seat and streamline dashboard provide low noise, air conditioning, comfortable operation and wide eyeshot.

MOLDBOARD

Dimensions	4320 × 545 × 16 mm
------------	--------------------

REFILL CAPACITIES

Fuel Tank	340 L
Crankcase	27 L
Transmission	28 L
Rear Axle	18 L
Tandem Housings	45 L × 2
Hydraulic System	90 L

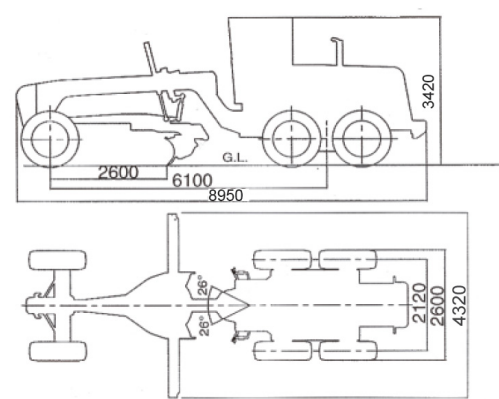

TECHNICAL SPECIFICATION

OPTIONAL FEATURES

Air Conditionner	Tyre Size 14.00-24
ROPS Frame	Front Blade
Ripper	Automatic Leveling Device

SCARIFIER

No. of Teeth	11
Digging Width	1325 mm
Max. Lift Above Ground	344 mm
Digging Depth	212 mm

RIPPER


No. of Shanks	3 (max. 5)
Max. Digging Depth	436 mm
Max. Lift Above Ground	611 mm
Max. Digging Width	2196 mm

FRONT BLADE

Blade Width	2501 mm
Max. Lift Above Ground	579 mm
Max. Grading Depth	125 mm

Equipped with Dongfeng Cummins engine. Single-handle electro-hydraulic controlled power shift T/M,6 forward & 3 reverse shifts makes operation easy and convenient. Optimum axle load allocation provides excellent stability while grading rough and rocky area. Box-Type frame and advanced T/M enable it to complete heavy-duty work. A wide working range is accomplished through flexible moldboard suspension system and articulated frame.

Best Matched Power Train

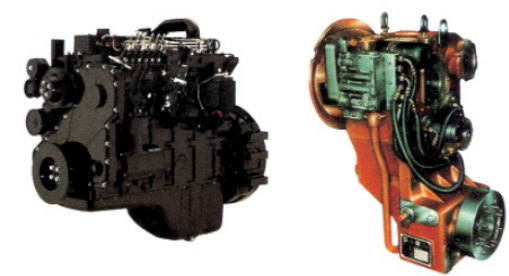

Equipped with Cummins engine that features strong power and low oil consumption. ZF transmission with single handle that features perfect performance and easy operation.